

PLUMBING KEYED NOTES

CONNECT GAS PIPING TO EQUIPMENT WITH UNION AND PLUG VALVE. RE: SHEET 6/P5.01 FOR DETAIL GAS LINE ROUTED ON ROOF, PROVIDE PIPE SUPPORTS PLACED AT 10 FT. SPANS MAXIMUM AND EVERY CHANGE OF DIRECTION, (4 FT. FROM ELBOWS).


2


SET GAS REGULATOR FROM 5 PSIG TO 80z. REFER TO PLUMBING SHEET 4/P5.01 FOR DETAIL. 1" GAS (5 PSI) UP FROM BELOW. ROUTE GAS PIPING ON ROOF. PROVIDE ROOFTOP PIPING SUPPORTS AT NO MORE THAN 10' INTERVALS. REFER TO SHEET P2.01 FOR CONTINUATION.

3

4

 $^3/_4$ " GAS (8 oz.) DOWN TO GAS WATER HEATER.

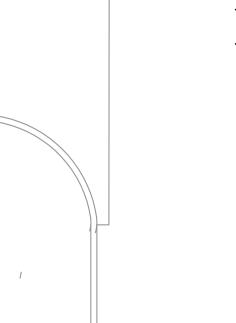

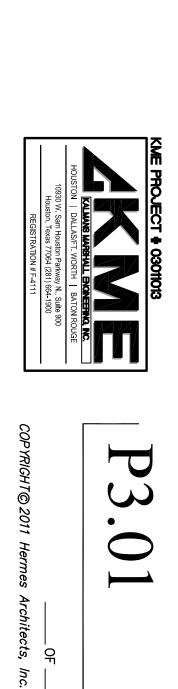


GARAGE

PLUMBING ROOF PLAN

STANDBY GENERATOR 1020 CFH

3/4" GAS LINE DOWN-

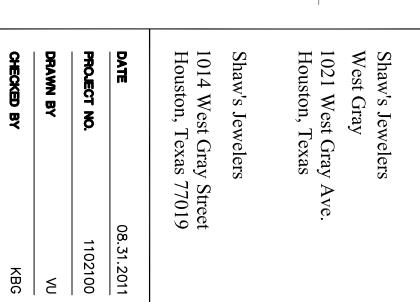


ROUTE 3/4"(5 PSI) GAS LINE UNDERGROUND TO STANDBY GENERATOR. PROVIDE 3" PVC SLEEVE.

PLUMBING ROOF PLAN

SCALE: 1/8" = 1'-0"

4

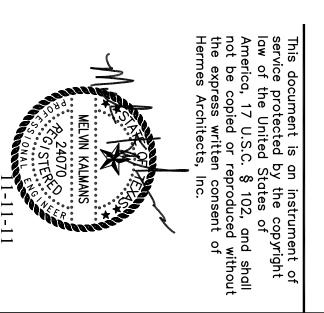

2 STORY BRICK BUILDING

GAS--5/4"-5 PSI (120 CFH)

-3/4"-5 PSI (240 CFH)

-3/4"-5 PSI (120 CFH)

2 STORY BRICK BUILDING

G __

2

GAS-3/4"-5 PSI (100 CFH)

(3/4"-5 PSI) (340 CFH)

(1360 CFH)

-3/4" GAS LINE DOWN

0

0

-(N)

-(ω)

4

5 79 CFH

4



Hermes Archiects

Members A.I.A.
1177 West Loop South, Ste. 500
Houston, Texas 77027
Tel. 713-785-3644
www.hermesarchitects.com
Houston \cdot Dallas/Ft. Worth